

E2.5 Signals & Linear Systems


Tutorial Sheet 4 – Laplace Transform

(Support Lecture 6)

1.* By direct integration, find the one-sided Laplace transforms of the following functions:

- a) $u(t) - u(t - 1)$
- b) $te^{-t}u(t)$
- c) $t \cos \omega_0 t u(t)$.
- d) $e^{-2t} \cos(5t + \theta) u(t)$.

2.* By direct integration, find the Laplace transforms of the following signals:

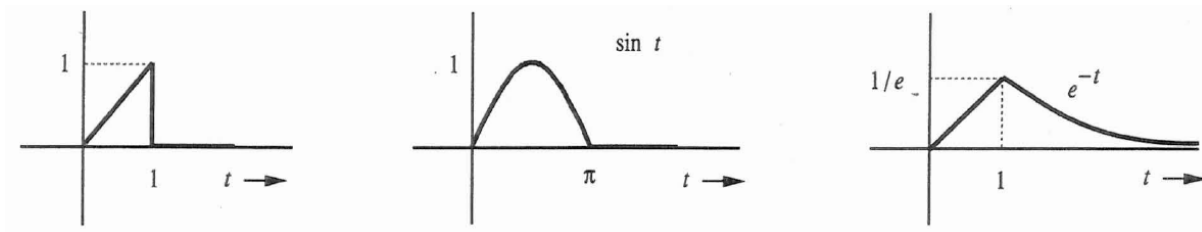

(a)

(b)

(c)

3.* Find the inverse (one-sided) Laplace transforms of the following functions:

- a) $\frac{2s + 5}{s^2 + 5s + 6}$
- b) $\frac{3s + 5}{s^2 + 4s + 13}$
- c) $\frac{(s + 1)^2}{s^2 - s - 6}$
- d) $\frac{2s + 1}{(s + 1)(s^2 + 2s + 2)}$

4.** Find the Laplace transforms of the following function using the Laplace Transform Table and the time-shifting property where appropriate.

- a) $u(t) - u(t - 1)$
- b) $e^{-(t-\tau)}u(t)$
- c) $e^{-t}u(t - \tau)$
- d) $\sin[\omega_0(t - \tau)]u(t - \tau)$
- e) $\sin[\omega_0(t - \tau)]u(t)$

5.** Find the inverse Laplace transform of the function:

$$\frac{2s + 5}{s^2 + 5s + 6} e^{-2s}.$$

6.*** The Laplace transform of a causal periodic signal can be found from the knowledge of the Laplace transform of its first cycle alone.

a) If the Laplace transform of $f(t)$ shown in Fig. 6 a) is $F(s)$, shown that $G(s)$, the Laplace transform of $g(t)$ shown in Fig. 6 b) is given by:

$$G(s) = \frac{F(s)}{1 - e^{-sT_0}} \quad \text{Re } s > 0$$




Fig 6 a)


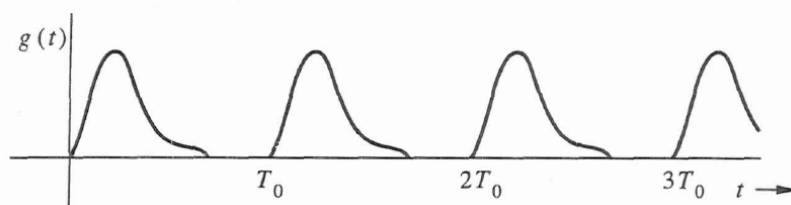


Fig 6 b)

b) Use the results in a), find the Laplace transform of the signal $p(t)$ shown in Fig. 6 c).

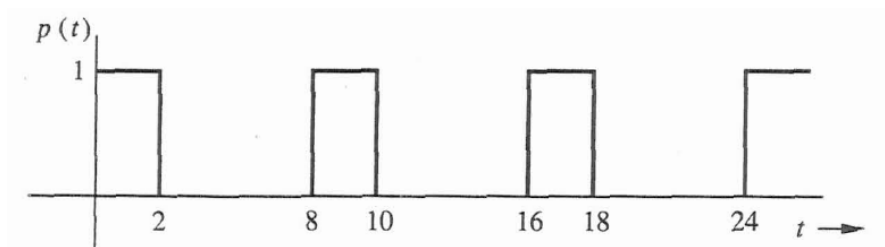

:Fig 6 c)

(Hint: Remember that $1 + x + x^2 + x^3 + \dots = \frac{1}{1-x}$ for $|x| < 1$.)